

Wireless-N Broadband Router

Share Your High Speed Wireless Network or Wimax Internet Connections

CWBR-1007



Quick Installation Guide

What's Included in the box

- CWBR-1007 Wireless N Broadband Router
- Quick Installation Guide
- Setup Software & User Manual on CD-ROM
- Power Adapter


Step 1: Device Setup

Insert one end of the Ethernet cable to the LAN port and the other end to your PC.
Connect power adapter to the Router's Power jack, and plug the other end into an electrical outlet.



Step 2: Login

On your PC or laptop, open web browser and type <http://192.168.1.1> into the Address bar. Press Enter. When login screen appears, type admin for both Username & Password. Click Login button to continue.

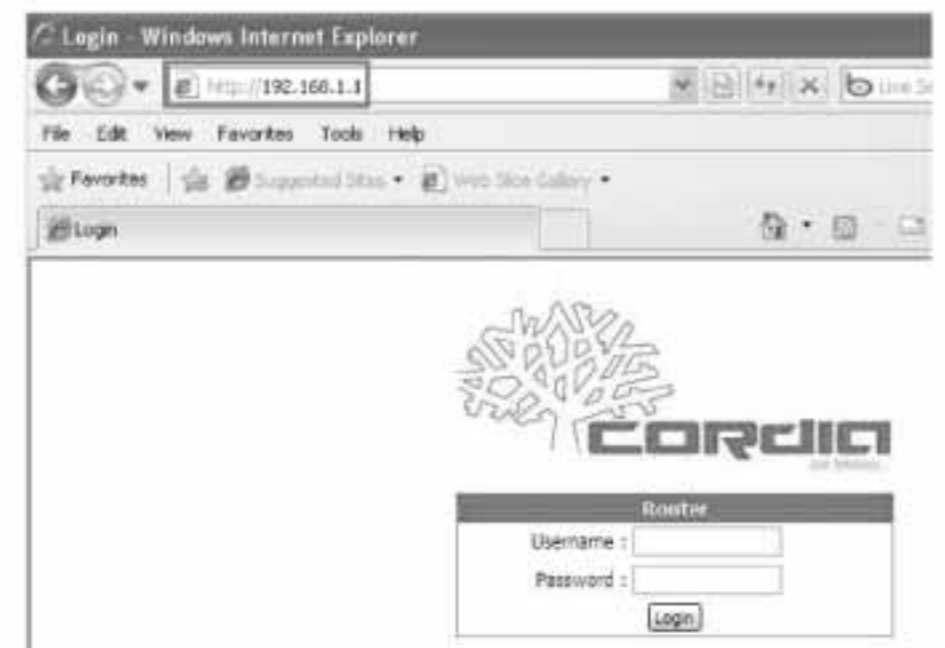

Step 3: Connect to the Internet

Through 3.5G USB Modem

Click on One Button Setup from the left navigation pane.

Insert your 3.5G USB Modem into the USB port. Select 3.5G usb dongle in WAN interface drop-down menu. Fill in information provided by your 3G service provider. Click Finish button to finish setup process. The router will be restarted shortly. Once the login page shows up, you are ready to surf the Internet!

Note: APN & Phone Number are required. User Name & Password can be optional. The common APN name is internet and the phone number is *99#.



Connect to the Internet through 3.5G USB Modem

Through xDSL Modem-PPPoE

Click on One Button Setup from the left navigation pane. Connect one end of the Ethernet cable to the WAN port of CWBR-1007, and another end to the Ethernet port of xDSL modem.

Select Ethernet Port in WAN interface drop-down menu and PPPoE in WAN.

Access Type drop-down menu. Fill in the user name and password provided by your xDSL service provider. Click Finsih button to finish setup process. The router will be restarted shortly. Once the login page shows up, you are ready to surf the Internet!

Connect to the Internet through xDSL Modem

USB Modem Does Not Work With the Router

If your USB modem is not working with the router. Check the support list to ensure you are using a supported device. If the device you have is not on the list, that means we do not support it at this time. Please consult the User Manual or contact Cordia Technical Support for further assistance.

How to Restore the Default Password and Configuration Settings

1. Use a sharp object such as a pen or a paper clip to press and hold the Reset button, located on the rear panel of the router next to the power jack, for about 10 seconds, until the STATUS light goes off.
 2. Release the Reset button, and wait for the router to restart, and for the Power light to stop blinking and become solid green.
- The factory default settings will be restored and the router's IP address will be reset to 192.168.1.1, user name to admin, and password to admin

Technical Information

LED Status Lights

Power Signifies the router has power Status Blinking Green light indicates Reset or Firmware updates is in progress.

WIRELESS/WPS Signifies that the WiFi radio of the router is "On". Blinking indicates traffic. Blinking Orange light indicates the router goes into "WiFi Protected Setup" mode.

WAN Signifies that connection is made on WAN port. Blinking indicates traffic LAN Signifies that connection is made on LAN port. Blinking indicates traffic.

How to Set up Broadband Internet Service & Other Functions

In the User Manual on product CD, You can find detail steps of:

- . Setting up Broadband Internet Service such as 3G, Cable modem, WiFi ISP
- . Advanced settings such as DDNS, Virtual Server, DMZ

For additional information, please visit the product website: <http://www.thecordia.com>

